

# Penetrates and Protects

Betonit Grout Sealer is a water-based penetrating sealer for cementitious tile grout. Improve the appearance of your floors while reducing cleaning time and costs.

## Applications

This ready-to-use, water-based formula penetrates, bonds with and protects POROUS TILE GROUT.

It may also be used to seal plaster, cement mortar, concrete and other porous masonry surfaces.

## Advantages

### BETTER-LOOKING FLOORS AND WALLS

- Preserves natural look and color of grout
- Creates an invisible shield that helps protect tile and grout from getting dirty or stained by resisting liquid penetration
- Protects against mildew growth on treated surfaces

### FASTER AND EASIER ROUTINE CLEANING

- Invisible shield helps prevent water-based stains from soaking into the grout, making mopping quick and easy.

### FRESHER SMELLING FLOORS

- Protects against odor-causing mildew on treated surfaces.

### EASY TO APPLY

- Can be applied 12 hours after grouting.



## How to use:

**SURFACE PREPARATION:** Tile grout or masonry surface must be (1) **FULLY-CURED** and (2) **CLEAN**. Make sure it is free from standing water, surface dirt, dust, loose materials, oils and other chemicals.

- Apply Grout Sealer at least 12 hours after grouting.

- Apply using a bristle brush, preferably just a little wider than the grout line for maximum coverage. Repeat application until the liquid sealer is not easily absorbed by the grout.




- Allow 24 hours curing time before exposure to water or foot traffic for maximum sealing performance.

### IMPORTANT NOTES:

- Make sure that the surface is fully cured, clean and dry prior to applying protector. A test application is necessary on surface to be treated to ensure compatibility and the desired results.
- Grout Sealer Liquid is OPAQUE WHITE. This will not affect the color of the grout. Freshly applied grout sealer may exhibit paling of colors, however, when grout sealer has fully cured, grout will return to its full natural color.
- If efflorescence like material appears after sealing, don't worry, this is only a water mark and can easily be wiped off.

### HOW IT WORKS:

- 1 Sealer lines the pores of the surface without filling or blocking it, to prevent liquid absorption while allowing grout material to "breathe" (water vapor permeable).
- 2 Also, it coats the surface to repel water, as seen by the "BEADING" effect.

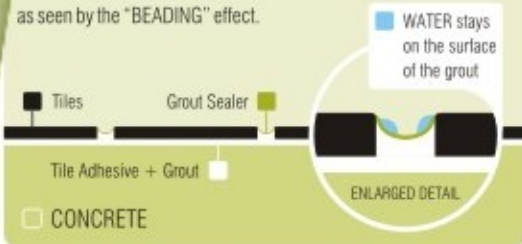

PRODUCT PACKAGE SIZE: 250mL Bottles  
COVERAGE for tiled surfaces: 12.5 sqm of grouted area  
COVERAGE for masonry surface: 2.5 sqm (at 10sqm/L per coat)

SHELF LIFE



MINIMUM SETTING TIME



USE PROTECTIVE WEAR



4 Finished off by effective sealing.